





► KEY FEATURES

Manage your fleet with powerful and easy to use features.

SUPERIOR MAPPING OPTIONS

Engineered for enterprise fleets.

> Google maps > PatchMaps > OpenStreet

LOCATION UPDATES

Track the location of your assets.

> Timed interval

MULTI-SAT ACCESS

GNSS receiver for enhanced accuracy

>GPS >GLONASS >Galileo

GEO-FENCE (LANDMARKS)

Location intelligence with virtual perimeter.

> Custom shapes > Icons > Group assignment

LOW MAINTENANCE

Extra-long life and replaceable AA battery

>No cable requirements >Mounts easily

REAL-TIME-ALERTS

Customizable text or email alerts.

> Landmark Entrance/Exit > Low Battery

ADVANCED REPORTING & ANALYTICS

Turn data into actionable insight.

> Multiple out-of-box reports >Auto-email report options

RUGGED AND DEPENDABLE

Canada-tested for harsh environments

>Reliable signal virtually anywhere >Dust and water-resistant

TTIoTAABattery



DIMENSIONS

Height: 100.6 mm / 3.96 in
Height w/tabs: 124.1 mm / 4.89 in
Width: 56.6 mm / 2.23 in
Thickness: 33.7 mm / 1.33 in
Weight: 0.4 lb

SELF POWERED ASSET TRACKER

▶ INDUSTRY LEADING ASSET TRACKING

Engineered to fit almost any application, the versatile device is a low-maintenance, high-performance asset tracking solution with the latest in coverage capabilities!

It ensures high accuracy with the latest LTE technology, utilizing three concurrent GNSS (GPS, Galileo, GLONASS). Stay informed about the location and status of your most valuable and vulnerable assets.

▶ A PURPOSE-BUILT SOLUTION FOR TRAILERS AND NON-POWERED ASSET TRACKING


By utilizing a long-life replaceable battery, the device does not require any cables or external power, making it the perfect solution for trailers, containers, or anything in between. Housed in a rugged water and dust-proof case, it is a durable, dependable, and low-maintenance solution.

▶ HIGHLIGHT FEATURES



MONITORING

- Location
- Light
- Acceleration
- Temperature
- Humidity
- Pressure



ALERTS

- Geofence Alert
- Low Battery Alert



SELF
POWERED



REPLACEABLE
BATTERY



3 AXIS
ACCELEROMETER



IP67



EASY
MOUNTING

MODEL TTloTAABattery

PRODUCT DETAILS

Installation Type	Easy Mount
GPS Antenna	GNSS (GPS, Galileo, GLONASS)
Network Modem Type	LTE CAT M1
Power Source	Replaceable battery
Accuracy	2.5m CEP
Certifications	FCC, IC, CE, AT&T, Verizon, T-Mobile, Bell IP67 Rugged & dust / water-proof enclosure

ENVIRONMENTAL

Sensor Operation Range

Temperature	-40c to +85 C; Absolute accuracy 0.5 C
Humidity	Absolute accuracy ± 3 %RH
Pressure	300...1100 hPa, Absolute accuracy ± 1 hPa
Batteries	-40c to +85 C

Device Operation Range


Temperature	-40c to +75c (batteries, enclosure)
Humidity	95% R.H. @ 50C non-condensing

REPORTING PARAMETERS

Timer based	Reports at a set timed interval regardless of motion (Eg: Every 12 hours)
Motion Continuous	Reports at a set interval while in motion, stops and a stationary timed interval (E.g: Every 12 hours while stationary, every 60 minutes while in motion)
Motion (Start Stop)	Reports when assets moves, stops and a stationary timed interval. (E.g. Starts and Stops, every 12 hours while stationary)

BATTERY MANAGEMENT

New Batteries	up to 3400 reports
---------------	--------------------

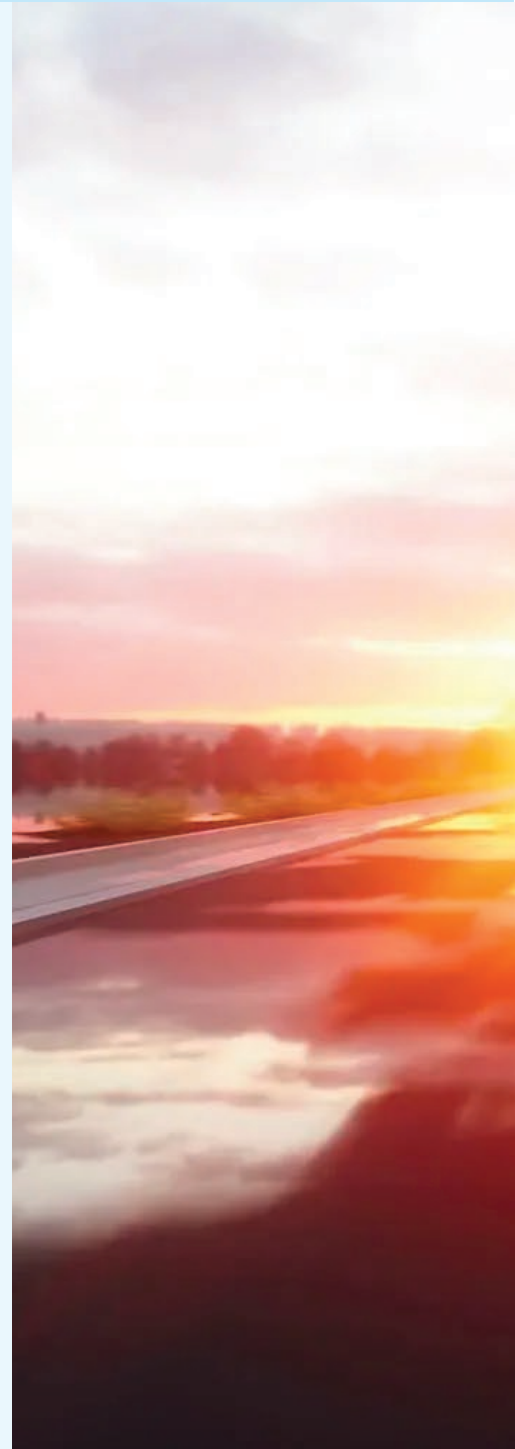

WE'RE HERE FOR YOU!

toll-free 855 287 4477

visit us titangps.ca

titangpstracking.com